



INTERNATIONAL ATOMIC ENERGY AGENCY
UNITED NATIONS EDUCATIONAL, SCIENTIFIC AND CULTURAL ORGANIZATION



INTERNATIONAL CENTRE FOR THEORETICAL PHYSICS
34100 TRIESTE (ITALY) - P.O.B. 586 - MIRAMARE - STRADA COSTIERA 11 - TELEPHONES: 224281/2/3 4/5 6
CABLE: CENTRATOM - TELEX 460392-I

SMR/104-10

COLLEGE ON SOIL PHYSICS

19 September - 7 October 1983

SOIL LOSS EQUATION FOR UPLAND EROSION PREVISION

G.S. CHISCI

Istituto Sperimentale per lo Studio
e la Difesa del Suolo
Piazza d'Azeglio 30
50121 Florence
Italy

These are preliminary lecture notes, intended only for distribution to participants.
Further or extra copies are available from Room 230.

Soil loss equation for upland erosion prediction (Summary of the lecture by G. CHISEL)

(1)

1. Historical evolution

1.1 Proposed lecture: J.K. MITCHELL and G. BURRER, Soilless estimation, chapter 2, in "Soil Erosion" ed. by M.J. KIRKBY and R.P.C. MORGAN, A Wiley Interscience pub., NY, 1980
(§§ 2.1 - Upland erosion prediction evolution)

1.2 The ZINGG's equation (1940):

$$A = CS^m L^{n-1} \quad [1]$$

A = average soil loss per unit area from land slope of unit width

C = a constant of variation combining the effect of rainfall, soil, crop and management

S = degree of land slope

L = horizontal length of land slope

m = 1.4, n = 1.6 exponents of degree and horizontal length of land slope, respectively

1.3 The MUSGRAVE's equation (1947):

$$E = (0.00527) I R S^{1.35} L^{0.35} P_{30}^{1.75} \quad [2]$$

E = the soil loss, mm, year

I = the inherent erodibility of a soil at 10 per cent slope and 22 m slope length, mm per year

R = a vegetal cover factor

S = degree of slope per cent

L = length of slope, m

P₃₀ = the maximum rainfall in 30', mm

1.4 The SMITH and WHITT'S equation (1947, 1948):

$$A = CS L K P \quad [3]$$

A = the average annual soil loss,

C = the average annual rotation soil loss from plot

S, L, K and P = multipliers to adjust the plot soil loss C for slope steepness, length, soil group and supporting conservation practices, respectively

1.5 The WISCHMEIER and SMITH'S universal soil loss equation (USLE) (1958, 1959)

$$A = (0.224) R K S L C P \quad [4]$$

A = the soil loss, kg/m²

R = the rainfall erosivity factor

K = the soil erodibility factor

L = the slope length factor

S = the slope gradient factor

C = the cropping management factor

P = the erosion control practice factor

1.6 The HUDSON'S erosion equation (1961) (identical in concept to USLE):

$$E = T S L P M R \quad [5]$$

E = the soil loss

T = the erodibility factor

S = the slope gradient factor

(3)

L = the slope length factor

P = agronomic or agricultural practice factor

M = mechanical protection factor

R = the intensity factor

The difference with USLE is mainly in the evaluation of factors for Sub-tropics Africa.

1.7 - The ELWELL's soil loss estimation system (Southern Africa) (1977).

$$Z = KCX \quad [6]$$

Z = predicted mean annual soil loss

K = mean annual soil loss from a standard field plot 30m x 10m at 4.5 per cent slope for a soil of known erodibility under bare fallow

C = the ratio of soil lost from a cropped plot to that lost from the standard plot

X = the ratio of soil lost from a plot of length L and slope S to that lost from the standard plot.

The K factor is dependent on rainfall kinetic energy and soil erodibility. The soil erodibility index is defined by base soil type and may be adjusted for permeability, structure and conservation practices. The crop cover factor C is a function of percentage of rainfall energy intercepted which is determined from a crop cover distribution curve for the assumed crop and the distribution of rainfall energy. The X factor is the same as SL in USLE.

(4)

1.8 The FOSTER et al.'s modified USLE for soil loss prediction on a single event basis (1977a, 1977b)

$$A = \underbrace{x L_e (a S^e) F_t C_x P_x / l_u}_{\text{rill erosion} = \bar{D}_r} + \underbrace{K_i (b S + c) R_t C_i P_i}_{\text{interrill erosion} = \bar{D}_i} \quad [7]$$

A = soil loss from a slope of x length

x = length of the slope

F_t = runoff erosivity $= (1 - y) 0.4 G q_p^{1/3}$; where y is a coefficient ($0 \leq y \leq 1$) that represents the relative importance of rainfall erosivity to runoff erosivity (The AA have used a value $y = 0.5$), G is the runoff volume in mm; q_p is the peak runoff rate in mm/h.

R_t = rainfall erosivity $= y R_{sc}$ or storm rainfall factor (EI_{30} units of the USLE)

K_r and K_i = erodibility of the soil by rill and interrill processes, respectively

a, b, c and e = coefficients

C_x and C_i = crop and management factors for rill and interrill erosion, respectively.

P_x and P_i = conservation practices factors for rill and interrill erosion, respectively

l_u = length of the unit plot in the USLE (m 22.1)

1.9 - The CHISO, SFALANGA and TORRI's soil loss equation on a single event basis for disturbed laboratory samples (1983)

(5)

$$A = \int_0^t (\alpha_0 + \alpha_1 + \alpha_2) F dt \quad [8]$$

A = soil loss, kg/m^2

α_0 = availability of soil material at the beginning of the event. In the laboratory can be estimated as: $\alpha_0 = 0.18 \exp \left[0.05 \frac{\Psi(1-\mu)}{D_u} \right]$ expressed in $\text{kg N}^{-1} \text{s}^{-1}$, where: Ψ is the material available as elementary particles and/or aggregated particles $< 63 \mu$ per cent; μ = soil wettability at saturation (fraction); D_u = saturated bulk density (gr/cm^3);

α_1 = splashed material. In the laboratory can be estimated as:
 $\alpha_1 = w \beta \left(\frac{\tan \gamma + \frac{4}{\pi} \tan \phi}{1 + \tan \gamma} \right) \left(\frac{E}{E_0} - 1 \right)$ expressed in $\text{kg N}^{-1} \text{s}^{-1}$, where:
 w = width of the plot, metres; β = constant; E = kinetic energy of rainfall in unit time; E_0 = dissipated kinetic energy = $18.8 \exp \left[\frac{-3.74 D_u}{1+\mu} \right]$; E and E_0 are expressed in $\text{KJ m}^{-2} \text{h}^{-1}$;
 γ = plot slope angle; $\tan \phi$ = initial slope of ~~splashed particles~~ the trajectory of splashed particles estimated by: $\tan \phi = 7030 \exp \left[\frac{-8.58 D_u}{1+\mu} \right]$

α_2 = a term for instability is not yet defined. It was demonstrated that α_2 is related to shear stress estimated by:

$$\tau = (\rho g)^{2/3} (3\nu)^{1/3} \sin^2 \gamma \cdot q^{1/3}; \text{ where: } \rho = \text{density of the fluid};$$

g = acceleration of gravity; ν = kinematic viscosity of the fluid; γ = slope angle; q = runoff discharge rate per unit width

(6)

F = runoff transport capacity which in the laboratory was estimated as: $F = \left(\frac{q}{3\nu} \right)^{2/3} \frac{w}{\rho^{1/3}} q^{5/3} \sin^3 \gamma$

1.9 CHISEL and BESCHI's empirical loss equation for estimating soil loss on a single event basis (1983) (Vertical outcrops soil)

$$Y = -1.03 + 0.38 \ln X_1 - 0.002 X_2 + 0.005 X_3 + 0.83 \sum_i \alpha_i + 0.23 \sum_j \beta_j + 0.063 \sum_k \gamma_k + 0.015 \sum_l \delta_l \quad [9]$$

Y = Soil loss for a single storm, metric tons/ha

X_1 = Total rainfall for the event, mm

X_2 = maximum intensity of rainfall in the event, mm/h

X_3 = R value for the event (EI₃₀ units of USLE)

$\alpha_1 = 0.86 D_1$; $D_1 = 1$ for lucerne ley autumn-winter stand (15/10 - 31/3)

$\alpha_2 = 1.01 D_2$; $D_2 = 1$ for lucerne ley summer stand (1/4 - 15/10)

$\alpha_3 = 0.73 D_3$; $D_3 = 1$ ^{for} arable summer crops (maize and/or sugar beets) (1/5 - 30/8)

$\alpha_4 = -1.53 D_4$; $D_4 = 1$ for wheat in the winter-spring period (15/12 - 31/5)

$\alpha_5 = 0.88 D_5$; $D_5 = 1$ for ploughed fallow

$D_i = 0$ in the reference condition represented by "seed bed" in the autumn and spring periods (1/5 - 30/5; 1/10 - 25/12)

$$\beta_1 = -0.45 D_1 \ln X_1$$

$$\beta_2 = -1.23 D_2 \ln X_1$$

$$\beta_3 = -0.77 D_3 \ln X_1$$

$$\beta_4 = -1.15 D_4 \ln X_1$$

$$\beta_5 = -0.40 D_5 \ln X_1$$

$D_i = 0$ is the reference condition as above

(7)

$$Y_1 = 0.41 D_3 X_3$$

$$Y_2 = 1.59 D_4 X_3$$

$D_k = 0$ is the reference condition as above. The condition is equal also for D_1, D_2, D_5

$$S_1 = -1.16 D_3 X_2$$

$$S_2 = 0.83 D_4 X_2$$

$S_k = 0$ is the reference condition as above. Such condition is equal also for D_1, D_2, D_5

The evaluation is standardized for a plot of 33 m length and 13% slope. The evaluation for slopes of different length and degree of slope can be made using SL corrections as in the USLE.

2. Detailed analysis of the USLE equation factors and modifications introduced in other environments for factor evaluation -

2.1 The rainfall erosivity factor, R

The rainfall erosion index presented by WISCHMEIER (1959) has been developed considering that storm soil losses from cultivated continuous fallow plot (22.1 m long and having a 9% degree of slope) is highly correlated to the cross product of the total kinetic energy and the maximum 30-minute rainfall intensity. This product, divided by EI, is a measure of the manner in which energy and intensity are combined in a storm and ~~therefore~~ defines the combined effect of raindrop impact and turbulence of runoff to transport

(8)

soil particles from a field.

WISCHMEIER has produced the following equation to estimate the kinetic energy of a rainstorm or a portion of a rainfall event:

$$E = 1.213 + 0.840 \log_{10} I \quad (10)$$

E = Kinetic energy $\text{Kgm/m}^2 \text{ mm}$

I = rainfall intensity, mm per hour

The kinetic energy for ~~an~~ intensity increment is obtained by multiplying the kinetic energy of equation (10) by the rainfall amount of that intensity increment. The ~~total~~ total energy, in Kgm/m^2 for a rainfall event can be computed by accumulating the kinetic energy for each ~~distinct~~ distinct intensity increments of the event. The overall computation of the R factor for an event can so be computed as follows:

$$R = \frac{\left[\sum_{j=1}^n (1.213 + 0.840 \log_{10} I_j) (I_j T_j) \right] I_{30}}{173.6} \quad (11)$$

where:

R = the rainfall erosivity index, $\text{Kgm/m}^2 \times \text{mm/hr}$

I_j = the rainfall intensity for a specific storm increment, mm/hr

T_j = the time period of the specific storm increment hr

I_{30} = the maximum 30-minute rainfall intensity for the storm, mm/hr

J = the specific storm increment

n = the number of storm increments

Example of Calculations

Time from start (min)	Rainfall mm	Intensity mm hr ⁻¹	Kinetic energy kg/m ² mm	total kinetic energy (x 2 x 14) kg/m ²
0-14	1.52	6.68	1.91	2.30
15-29	14.23	56.88	2.27	34.39
30-44	26.16	104.64	3.01	78.74
45-59	31.50	126.00	3.08	97.02
60-74	8.38	33.52	2.57	-
75-89	0.35	1.00	-	-

Total E = 218.05

maximum 30-min rainfall 26.16 + 31.50 = 57.66 mm

maximum 30-min intensity = 57.66 x 2 = 115.32 mm hr⁻¹

EI₃₀ = 25145.52 kg/m² . mm hr⁻¹

EI₃₀ = standard units = $\frac{25145.52}{173.6} = 144.85$

This unit is in accord with the unit of K as it will be seen later so that the product R x K would give the soil loss A in kg/m² -

The rainfall erosivity indexes can be summed for any time period to provide numerical measure of the erosivity of rainfall in that period (*).

For any hydrologic evaluation there is an associated annual distribution of the phenomena being investigated. The monthly and annual distribution for different area are normally different for some portion of the distribution curve.

* For the calculation of R, WISCHMEIER and SMITH (1965) have established a threshold value for a storm to be considered capable to give runoff and erosion of 12.7 mm of rain.

Typical distribution curves are shown in Figure 1 for the three areas. These distributions are used with detailed cropping management data to obtain seasonal cropping factors or to combine crop rotation information as will be described later.

The computation of R from long term precipitation records is cumbersome. Simplifying methods have been developed. For the conterminous USA, the 2 yr probabilities of 6 hr rainfall (P) were best correlated with R:

$$R = EI_{30} = 27.38 P^{2.17} \quad [12]$$

Based on this index, an isocluent map was prepared for USA east of the Rocky Mountains.

Other simplifying methods have been developed especially for locations where rainfall records do not consent a storm to storm analysis but only day or months long duration rainfall data are available.

As a very simple example, average annual R values for the West Africa were calculated by ROOSE (1977) using a simple empirical relationship:

$$R_{an}/H_{an} = 0.50 \pm 0.05 \quad [13]$$

Another very simple ~~correlation~~ correlation equation was presented by ARNOLDUS (1980) to estimate annual average long term values of R from the average long term monthly and annual rainfall (p and P respectively)

FIGURE - 1

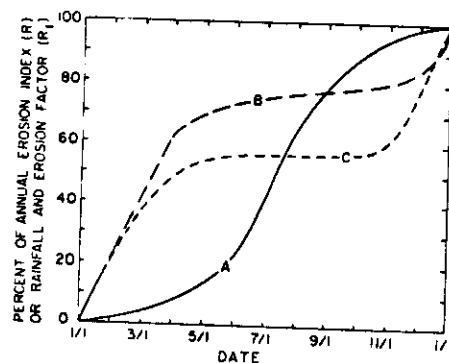


Figure 2.3. Distribution curves of erosion-index, R , for: (A) Central corn belt (northern Missouri and central Illinois, Indiana, and Ohio) (Wischmeier and Smith, 1965); (B) Dryland grain region of the Pacific Northwest, tentative (McCool *et al.*, 1977) (Reproduced by permission of SCSA); and (C) South Central part of Island of Molokai (USSCS, 1976)

$$\log R = b \log \sum_{i=1}^n \frac{P_i^2}{P} - a \quad [14]$$

An example of application of such a regression equation was based on data of 178 stations of which 164 in USA and 14 in west Africa.

$$\log R = 1.93 \log \sum_{i=1}^{12} \frac{P_i^2}{P} - 1.52 \quad (R^2 = 0.81) \quad [15]$$

Besides R other index of erosivity when proposed by different Authors ~~for~~ especially for tropical countries. HUDSON (1971) conducted extensive soil erosion studies in sub-tropical Africa. He found that the kinetic energy of rainstorms in tropical Africa were best calculated by the following equation:

$$E = 29.8 - \frac{127.5}{I} \quad [16]$$

where:

E = Kinetic energy ($J.m^{-2}.mm^{-1}$)

I = rainfall intensity ($mm.h^{-1}$)

HUDSON found that kinetic energy of individual storm > 25.4 mm of rain per hour was best correlated to soil loss than the R index of WISCHMEIER. He described this parameter as $KE > 25$ index.

LAL (1977) has found in the tropics a lower correlation coefficient between ~~the~~ R and soil loss than that was obtained for the region explained in USA. LAL reported a better

(12)

correlation with the product of total rainfall amount (A) and peak storm intensity (I_m) than either R and $KE > 25$. The annual index AI_m is calculated according to the following equation:

$$AI_m = \left\{ \sum_{i=1}^{12} \sum_{j=1}^n (a_{ij} i_m) \right\} (0.64 - R^2) [17]$$

where:

a = total rainfall in any storm in cm

i_m = maximum storm intensity in cm/hr

n = number of rainy days in the month

KOWAL and KASAM (1977) have produced an equation for the dropies to ~~cal~~ calculate kinetic energy of rainstorms in Jm^{-2} from the rainfall amount (R_a)

$$E = 41.4 R_a - 120.0 [18]$$

The negative intercept of this equation suggest that rainstorms with total rainfall < 3.6 mm have zero kinetic energy in relation to soil loss

(13)

2.2- The soil erodibility factor, K

The soil erodibility factor, K , in the USLE is a quantitative description of the ~~soil~~ inherent erodibility of a particular soil. The factor reflects the fact that different soils erode at different rates when the other factors that affect erosion are the same. Soil properties that affect infiltration rate, permeability, total water capacity, dispersion, splash, abrasion and transporting forces also affect erodibility.

For a particular soil, the soil erodibility factor, K , is the rate of erosion in ~~kg~~ $kg m^{-2}$ per unit of erosivity index from a standard plot. The standard plot used for USLE development is 22.13 m long on a uniform lengthwise slope of 9%. The plot is tilled up and down slope and maintained in continuous bare fallow for at least two years -

Direct measurement of K were made for 26 major soil of USA. Following these initial measurements, the K values were approximated for numerous other soils

Indications of general magnitude of K is reported in table. Direct measurement of the K factor require considerable time and equipment and is costly to perform.

Erodibility varies with soil texture, aggregate stability, shear strength, infiltration capacity and organic and chemical components. In an effort to eliminate the empirical procedure, a study was conducted to describe K using different soil properties

TABLE - 1

Table 2.2. Indications of the general magnitude of the soil-erodibility factor, K*

Texture class	Organic matter content		
	<0.5 per cent	2 per cent	4 per cent
	K	K	K
Sand	0.05	0.03	0.02
Fine sand	0.16	0.14	0.10
Very fine sand	0.42	0.36	0.28
Loamy sand	0.12	0.10	0.08
Loamy fine sand	0.24	0.20	0.16
Loamy very fine sand	0.44	0.38	0.30
Sandy loam	0.27	0.24	0.19
Fine sandy loam	0.35	0.30	0.24
Very fine sandy loam	0.47	0.41	0.33
Loam	0.38	0.34	0.29
Silt loam	0.48	0.42	0.33
Silt	0.60	0.52	0.42
Sandy clay loam	0.27	0.25	0.21
Clay loam	0.28	0.25	0.21
Silty clay loam	0.37	0.32	0.26
Sandy clay	0.14	0.13	0.12
Silty clay	0.25	0.23	0.19
Clay		0.13-0.29	

* The values shown are estimated averages of broad ranges of specific-soil values. When a texture is near the borderline of two texture classes, use the average of the two K values. For specific soils, use of Figure 2.6 or Soil Conservation Service K-value tables will provide much greater accuracy from ARS, 1975.

18 bis

and their interactions.

A soil erodibility nomograph was developed for the estimation of K by WISCHMEIER et al. (1971) (figure 2). Five soil parameters are needed to use the nomograph: per cent silt (0.002-0.05 mm) plus very fine sand (0.05-0.10 mm), per cent sand (0.10-2 mm), organic matter content, structure and permeability. The ~~soil~~ structure and permeability classes are shown in figure 2. Additional information on permeability classes given by WISCHMEIER et al. (1971) are: code 6 for soil as 6; code more permeable soil ~~underlain~~ underlain by massive clay or silty clay as 5; code moderately permeable surface soil underlain by a silty clay or silty clay loam having a weak subangular or angular blocky structure as 4; and code as 3 if the subsoil structure grade is moderate or strong or the texture is coarser than silty clay loam.

The equation used to develop the nomograph is the following:

$$100 K = 2.1 M^{1.14} (10^{-4}) (12-a) + 3.25(b-2) + 2.5(c-3) [19]$$

where:

$$M = [\text{silt \%} + \text{fine sand \% (0.002-0.1 mm)}] \times \left[\frac{100}{100 - \text{clay (<0.002 mm)}} \right]$$

a = organic matter per cent

b = index of soil structure: 1 = very fine granular; 2 = fine granular; 3 = med. or coarse granular; 4 = blocky, platy or massive.

14

FIGURE - 2

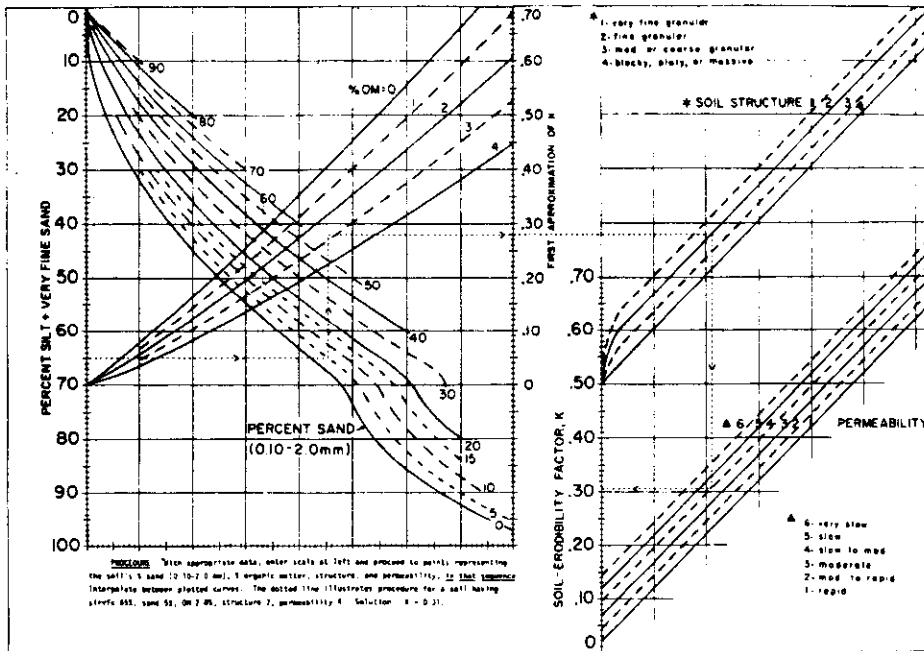


Figure 21. Wischmeier's nomograph for soil erodibility estimation. (Wischmeier et al. 1971)

$C = \text{index of permeability} = 6 = \text{very slow}; 5 = \text{slow};$
 $4 = \text{slow to mod.}; 3 = \text{moderate}; 2 = \text{mod. to rapid}; 1 = \text{rapid}.$

To obtain R values for natural conditions ROTH et al. (1974) developed another nomograph & taking a consideration mineralogical composition (figure 3).

A series of tables ^{indicating} ~~representing~~ variability of soils for several sites are reported by EL-SWAIFY et al. (1982).

2.3 - The slope length factor L , and the slope gradient factor S .

The effects of slope length and gradient are represented in the USLE as L and S respectively; however, they are often evaluated as a single topographic factor LS . Slope length is defined as the distance from the point of origin of overland flow to the point when the slope decreases sufficiently for deposition to occur or to the point where runoff enters a defined channel. The channel may be part of a drainage network or a construction channel. Slope gradient is the segment slope, usually expressed as percentage. The development of the USLE was based on a standard plot length of 22.13 metres; therefore, the slope-length factor was defined as:

$$L = \left(\frac{x}{22.13} \right)^m \quad [30]$$

FIGURE - 3

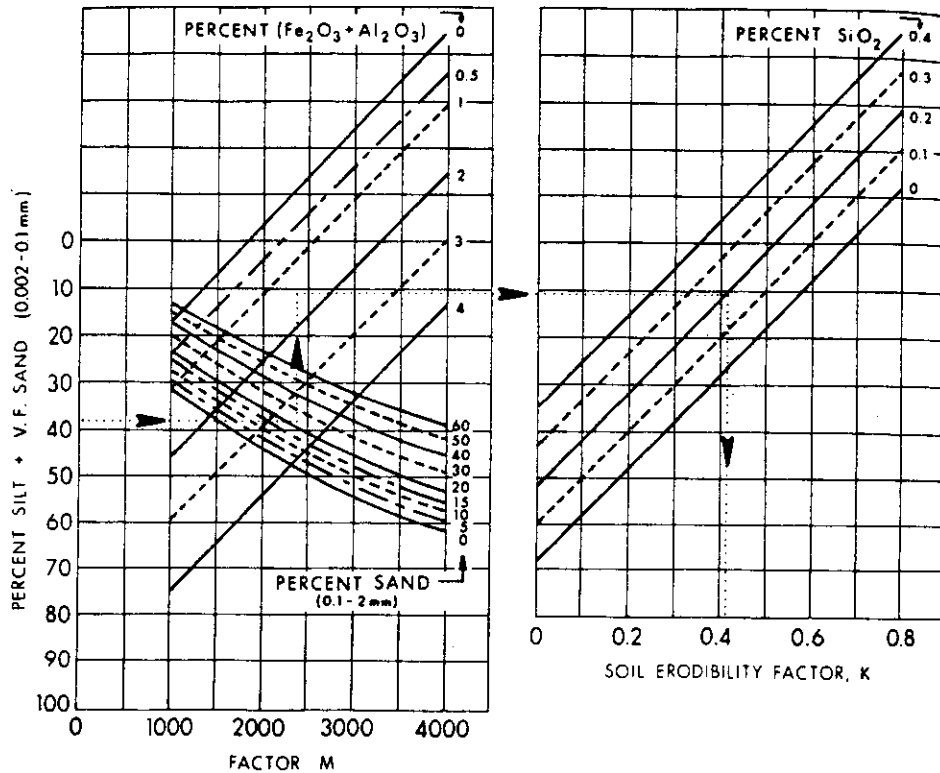


Figure 22. Roth, Nelson, and Romkens' (1974) nomograph for soil erodibility estimation.

where:

L = slope length factor

ze = slope length metres

m = an exponent

Current recommendation (WISCHMEIER & SMITH, 1978) for the exponent m , are:

$m = 0.5$ if slope ≥ 5 per cent

$m = 0.4$ if slope < 5 per cent and > 3 per cent

$m = 0.3$ if slope ≤ 3 per cent and ≥ 1 per cent

$m = 0.2$ if slope < 1 per cent

These recommendations are reflected in the construction of the slope effect chart (figure 4).

SMITH and WISCHMEIER (1957) also determined that soil loss was correlated with a parabolic description of the effect of slope steepness gradient. Normalizing this equation to standard slope of 9 per cent resulted in a description of the slope-gradient factor:

$$S = \frac{0.43 + 0.30s + 0.043s^2}{6.613} \quad [21]$$

where:

S = the slope gradient factor

s = the gradient per cent

Equation [21] is recommended for the slope gradient factor and used in the development of the slope effect chart (figure 4).

FIGURE - 4

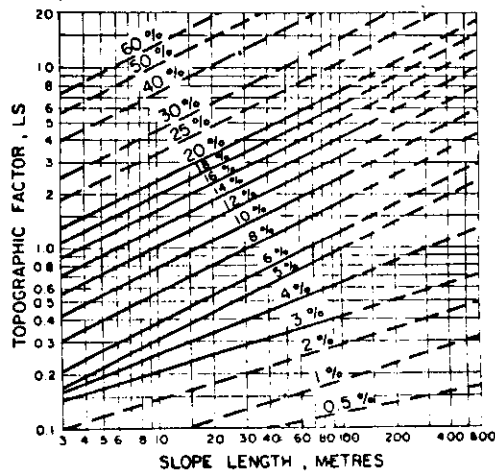


Figure 2.7. Slope length and gradient factor, LS, for use with the Universal Soil Loss Equation

16 bis

Values of SL may be computed directly by the following equation:

$$SL = \left(\frac{x}{22.13} \right)^m (0.065 + 0.045s + 0.0065s^2) \quad [22]$$

when all the terms have been previously defined. Figure 4 was developed and should be used only for uniform slopes. The use of the topographic factor LS will usually overestimate soil loss from concave slopes and underestimate soil loss from convex slopes.

ONSTAD et al. (1967) and FOSTER and WISCHMEIER (1974) provided a method for estimating LS for irregular slopes. The irregular slope is divided into a series of uniform slope segments in relation to slope and soil type. The soil loss for the entire slope is then computed:

$$A = (0.224) \frac{RCP}{22.13} \sum_{j=1}^n K_j \left[\frac{S_j x_j^{m-1} - S_j x_{j-1}^{m-1}}{(22.13)^m} \right] \quad [23]$$

where

K_j = soil erodibility factor for the j th slope segment

x_j = the distance from the top of the slope to the lower end of the j th segment, metres

x_{j-1} = the slope length from the top of the slope to upper end of the j th segment, metres

x_e = the overall slope length, metres

S_j = the value of the slope-gradient factor of the j th segment

A, R, C, P and m are as defined previously

17

Also a change of the factor C along the slope can be treated in the same manner as for K -

We will return to tolerance limits for soil losses but at the moment we can suppose that we would like to avail a maximum soil loss for ~~time~~ yr T from a given slope. In such a situation SL can be calculated as it follows.

$$SL = \frac{T}{RKCP(0.24)}$$

given ~~the~~ the specific slope gradient & the maximum length σ can be calculated as follows.

$$x_c = 514.9 \left(\frac{SL}{0.43 + 0.30s + 0.043s^2} \right)^{\frac{5}{3}}$$

on the other hand being given the slope length & the maximum gradient s can be calculated as follows.


$$s = \frac{-0.30 + \sqrt{0.09 - 0.172c}}{0.086}$$

where:

$$C = \frac{0.43 \text{ m} - 42.368 \text{ SL}}{\text{m}}$$

Example of Calculus:

Assume a convex slope of the following segment

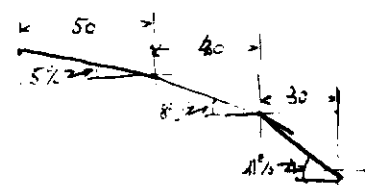

5% for 50 m 8% for 40 m 11% for 30 m

Tobular solution is made as follows:

$$u_j = \frac{S_j x_j^{m+1}}{(22.13)^m} \quad u_{j-1} = \frac{S_j x_{j-1}^{m+1}}{(22.13)^m}$$

no	Segment			x_j	x_{j-1}	u_j	u_{j-1}	$u_j - u_{j-1}$	Segment LS	% of total sum of LS
	slope %	S_j	length, m							
1	5	0.454	50	50	0	34	0	34	0.68	13
2	8	0.844	40	90	50	153	63	90	2.25	35
3	11	1.351	30	124	90	378	245	$\frac{133}{957}$	4.43	$\frac{52}{100}$
			<u>120</u>							
								weighted average LS	2.14	

2.4 - The cropping management factor, C -

The cropping management factor represents the ratio of soil loss from a specific cropping or cover condition to the soil loss from a tilled continuous fallow condition of the same soil and slope and for the same rainfall. This factor includes unimulated effects of cover, crop sequence, productivity level, growing season length, cultural practices, erosion management and rainfall distribution. Crops can be grown continuously or can be rotated with other crops. The evaluation of C factor is often difficult because of the many cropping and management systems. Rotations are various in length and sequences. Residues can be removed or left on the field or incorporated in the soil. Each segment of the cropping and management sequence must be evaluated in combination with the rainfall erosivity distribution for the region, using the seasonal distribution curve (Figure 1).

General effect of cropping and management are presented by WISCHMEIER (1966) and WISCHMEIER and SMITH (1965) in the form of extensive tables of soil loss ratios. Greatly expanded tables of C factor values were presented by WISCHMEIER and SMITH (1978) -

We would consider here ~~at~~ only some example either for a rotational crop sequence or for the evaluation of C for no-till areas.

~~Table~~

Table 2 ~~is~~ illustrates for a series of crops, six crop-stage periods.

Table 3 - Soil-loss ratios for selected crops

Cover, sequence and management	Productivity kg/m ²	Soil loss ratios, percentage for crop-stage period (b)					
		F	SB	1	2	3	4
First-year corn after grain and legume hay, spring turn plough, conventional tillage, residue left	0.6+	8	22	19	17	10	14
Small grain in disked row-crop rotation after one year corn, after meadow	-	-	12	12	11	7	2
Grass and legume meadow	0.7+	-	-	-	-	-	0.4

~~See also Table 2 for soil loss ratios for various crops~~

(b) crop-stage periods

F = rough fallow

SB = seed-bed to 10% canopy cover

1 = Establishment; 10-50 per cent canopy cover

2 = Development; 50-75 per cent canopy cover

3 = Maturing crop; 75 per cent canopy cover to crop harvest

4 = Residue or ~~stubble~~ stubble. Crop harvest to ~~ploughing~~ ploughing or new seeding

An example of calculation of the ~~unweighted~~ weighted average C value for a 3-year rotation follows in Table 3.

(20)

Table 3- Example of Cropping management (C) factor calculation (Corn-Cat-Meadow 3 yr rotation! (Central Corn Belt, USA, use curve A of figure 1 for R relative frequency distribution)

Crop stage period	Dates	Percent of R	Crop-stage soil loss C percentage	C factor
Meadow	1/1-4/5	10	0.4	0.0004
Rough ploughed soil (F)	4/15-5/5	5	8	0.0040
Dried and corn weeded (SB)	5/5-6/1	10	22	0.0220
10-50% canopy (1)	6/1-6/20	13	19	0.0247
50-75% canopy (2)	6/20-7/10	14	17	0.0238
75% canopy - harvest (3)	7/10-10/15	40	10	0.0400
Residue (4)	10/15-12/31	8	14	0.0112
Oat seed bed (SB)	4/1-4/15	2	12	0.0024
10-50% canopy (1)	4/15-5/1	4	12	0.0048
50-75% canopy (2)	5/1-6/1	11	11	0.0121
75% - harvest	6/1-6/15	9	7	0.0063
New meadow is oat stubble	6/15-8/15	38	2	0.0076
meadow (16.5 months)	8/15-1/1	128	0.4	0.0512
Total		300		0.1756
Average C Factor				0.0585

For the determination of the C value for undisturbed areas WISEMEIER (1975) has developed a method based on the following equation

$$C = C_1 C_2 C_3 \quad (24)$$

where:

C_1 = the vegetation and soil management factor

C_1 = represent the effect of the canopy cover and depends on the surface of soil covered by the vegetation of different height. (figure 5) (type effect I)

C_2 = is the effect of mulch and close-growing vegetation (type II effect) (figure 6) and depends of the percent of soil covered by mulch)

C_3 = is the regional effect of land use (type III effect) and depends from the root network in top soil relative to food rotation rotation (figure 7)

Some C values for permanent pastures, rangeland and idle land are reported from WISEMEIER (1975) in table 4 - Other C values for West Africa obtained by ROUSE (1972) are listed in table 4bis

2.5 - The erosion control practice factor, P

The erosion control practice factor is the ratio of soil loss using the specific practice compared with the soil loss using up-and-down hill culture. The erosion control practices usually included in this factor are contouring, contour strip cropping and terracing. Conservation tillage, crop rotation, fertility treatments and the reduction of residues are also

21 bis

21 bis

FIGURE-5

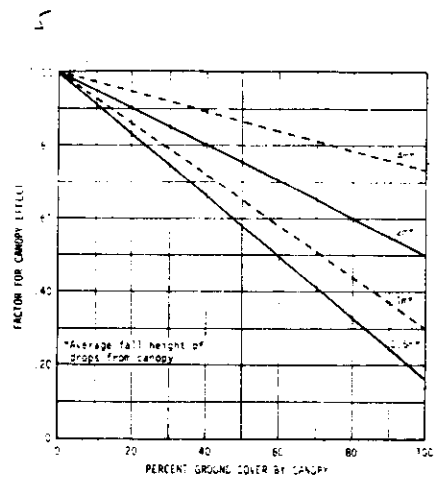


FIGURE 1.—Influence of vegetal canopy on effective EI , assuming bare soil beneath the canopy, and based on the velocities of free-falling waterdrops 2.5 mm in diameter.

FIGURE - 6

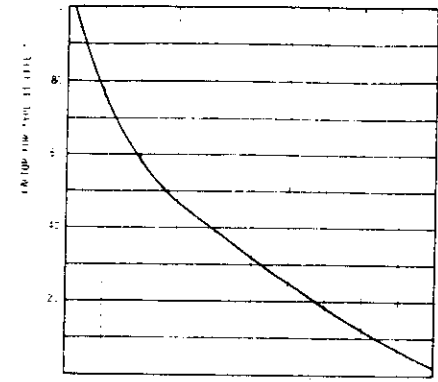


FIGURE 2.—Effect of plant residues or close-growing stems at the soil surface on C-factor (does not include subsurface root effects).

21 quads

21 quads

FIGURE - 7

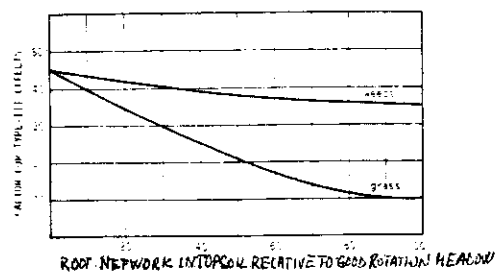


FIGURE 3.—Type III effects of undisturbed land areas on C-factor. These values do not apply to cropland and construction sites.

TABLE - 4

Table 2.7. C values, percentage for undisturbed land^a

Vegetal canopy	Percentage Cover ^b	Mulch or vegetation at ground surface ^c Percentage cover					
		0	20	40	60	80	95-100
None		45	24	15	9.1	4.3	1.1
Tall weeds or short brush, 0.5 m effective height	25	36	20	13	8.3	4.1	1.1
	75	17	12	9	6.8	3.8	1.1
Brush or bushes, 2 m effective height	25	40	22	14	8.7	4.2	1.1
	75	28	17	12	7.8	4.0	1.1
Trees, 4 m effective height	25	42	23	14	8.9	4.2	1.1
	75	36	20	13	8.4	4.1	1.1
Factor to obtain C values with grass or compacted duff ground cover ^d		1.0	0.53	0.67	0.46	0.30	0.27

- ^a From Wischmeier, 1974. (Reproduced by permission of SCSA).
^b C values in Table are for ground cover of weeds or undecayed residue.
^c For canopy cover between 25-75 per cent, straight line interpolation is appropriate.
^d To obtain C values for ground cover of grass or compacted duff, multiply the C value from the table by the factor.

TABLE-4 bis

Table 29 The vegetal cover factor and cultural techniques (C factor) in West Africa*

Practice	Annual Average C Factor	
Bare soil	.1	
Forest or dense shrub, high mulch crops	0.001	
Savannah, prairie in good condition	0.01	
Over-grazed savannah or prairie	0.1	
Crop cover of slow development or late planting: 1st year	0.3 to 0.8	
Crop cover of rapid development or early planting: 1st year	0.01 to 0.1	
Crop cover of slow development or late planting: 2nd year	0.01 to 0.1	
Corn, sorghum, millet (as a function of yield)	0.4 to 0.9	
Rice (intensive fertilization)	0.1 to 0.2	
Cotton, tobacco (2nd cycle)	0.5 to 0.7	
Peanuts (as a function of yield and the date of planting)	0.4 to 0.8	
1st year cassava and yam (as a function of the date of planting)	0.2 to 0.8	
Palm tree, coffee, cocoa with crop cover	0.1 to 0.3	
Pineapple on contour (as a function of slope)	burned residue	0.2 to 0.5
	buried residue	0.1 to 0.3
	surface residue	0.01
Pineapple and tie-ridging (slope 7 per cent)	0.1	

* From Roose, 1977 (Reproduced by permission of ORSTOM and SCSA).

important erosion control practices. However, these erosion practices are usually included in the cropping management & factor selected ~~any~~ carrier.

The factor P is estimated by DISCHER and SMITH (1978) for the three major mechanical conservation measures are reported in table 5. These values have been found to vary ~~to~~ for slope up to 25%. Within a practice type the P factor is most effective for the 3-8% slope range and values increase as the slope increases. As the slope decreases below 2 per cent the practice factor value increases due to the reduced effect of the practice when compared to up-and-down-hill conservation. The factor for terracing in table 5 is for the prediction of the total off-the-field soil loss. If within-terrace interval soil loss is desired, the interval distance should be used for the slope length factor L and the contouring P value used for practice factor.

The P factor estimated for several erosion control practices in West Africa by ROOSE (1977) is illustrated in table 6 -

2.6 - Soil loss tolerance

Soil loss tolerance is defined as the maximum rate of soil ~~loss~~ erosion that permits a high level of productivity to be sustained. Tolerances for specific soils in USA have been the subject of several workshops where soil scientists have collectively evaluated the soils and then recommended tolerance values. In general, deep, medium textured, moderately permeable soils

22613

22613

TABLE - 5

Table 2.10. Erosion control practice factor, P^a

Land Slope, percentage	Contouring	Contour Strip cropping and Irrigated Furrows	Terracing ^b
1-2	0.60	0.30	0.12
3-8	0.50	0.25	0.10
9-12	0.60	0.30	0.12
13-16	0.70	0.35	0.14
17-20	0.80	0.40	0.16
21-25	0.90	0.45	0.18

^a From Wischmeier and Smith, 1978.^b For prediction of contribution to off-field sediment load.

TABLE - 6

Table 53. P factor for conservation practices in West Africa

Conservation practices	P factor
Tied-ridging	0.20-0.10
Antierosive buffer strips from 2 to 4 m width	0.30-0.10
Straw mulch	0.01
Curasol mulch (60 g/l/m ²)	0.50-0.20
2-3 years of temporary grassland	0.5-0.1
Reinforced ridges of earth or low dry stone walls	0.1

Source: Roose, 1977c.

that have subsided characteristics favourable to (23) plant growth when assigned maximum tolerances of $1.1 \text{ Kg/m}^2/\text{yr}$. The actual range of tolerance limits given by the Soil Conservation Service in USA is between $0.2 - 1.1 \text{ Kg/m}^2/\text{yr}$. However, GREGG (1979) felt that since most estimates of annual soil renewal are $< 0.05 \text{ Kg/m}^2/\text{yr}$ one can assume that, in time, this limits will reduce progressively the top soil. His specific recommendation in relation to a program for soil loss abatement were:

- 1) To maintain the present limits of $0.2 - 1.1 \text{ Kg/m}^2/\text{yr}$ at the soil series level which could be modified as knowledge of the effect of long-term erosion improves
- 2) To reduce the upper limit of $1.1 \text{ Kg/m}^2/\text{yr}$ for those soil geographical areas where lower level can be maintained with slight shifts in soil management
- 3) State and local technical people would develop T values based on local crop production needs and experiences — GREGG and BERGMAN (1979) proposed the use of a variable allowable soil loss tolerance (T -value) based on the depth of soil favourable to plant rooting.

The protection (argument) of favourable rooting starts with depth of common plant rooting. An increment of variable thickness is added, determined by the shallowest depth of any of four root-limiting conditions: (1) presence of taxonomic features that include root limitations as part of the definition, (2) other ~~of~~ horizons with high strength

and weak structure that probably restrict roots nearly totally; (3) horizons that permit roots but restrict them strongly to planes $> 5 \text{ mm}$ apart; (4) horizon relatively high in extractable aluminium and or low in calcium. Finally, a standard increment is added to the favourable rooting depth on the assumption that the upper part of the root-limiting zone could be made favourable by tillage and amendments.

For illustrative purpose, the relationship could be as follows:

Potential favourable rooting Depth cm.	T -rate T-rate $\text{Kg/m}^2/\text{yr}$
0-25	NA
25-50	0.4
50-100	0.8
100-150	1.2
150-200	1.6
> 200	2.0

SKIDMORE (1979) described a function he developed for defining soil-loss tolerances for permanent preservation of the soil resource. The relationship is expressed by:

$$T(x, y, z) = T_1 + (T_2 - T_1)/2 + [(T_2 - T_1)/2] \cos \left\{ \pi + [(Z - Z_1)/(Z_2 - Z_1)] \pi \right\} \quad [25]$$

where:

$T(x, y, z)$ = the tolerance soil loss rate at point (x, y) mm/yr

T_1 and T_2 = ~~soil~~ are lower and upper ~~soil renewal rate~~ limits of allowable soil loss rate, respectively; T_1 corresponds to soil renewal rate - (in mm/yr)

Z_1 and Z_2 = are minimum allowable and optimum soil depths
 Z = is the present soil depth

Tolerance soil loss function between the points (T_1, Z_1) and (T_2, Z_2) is sinusoidal and dependent upon soil depth and $(T_2 - T_1)/2$ is the amplitude. The period is represented by the cosine argument and goes from zero to 180 degrees for values of Z between the limits of Z_1 and Z_2 .

2.7 Sediment Yield prediction

Generally, specific modifications of the USLE have been developed especially for sediment yield prediction from small watersheds.

We shall deal here with an example of modification which was used by WILLIAMS (1975):

$$Y = 11800 (Q q_p)^{0.56} K C P L S \quad [26]$$

where:

Y = Sediment yield from an individual storm, R_g

Q = storm runoff volume, m^3

q_p = peak runoff rate m^3/sec

$K C P L S$ are a output of the USLE

A sediment delivery ratio was considered not necessary when the rainfall term R of the USLE was replaced by the

Example of application of SKIDMORE's equation for the evaluation of T-tolerance limit for soil erosion:

A soil in the position (x, y) is 14 m deep (Z). The construction of such a soil is estimated to be eliminated down to 2.0 m (Z_2) and that a depth of 0.5 m (Z_1) would be the minimum allowable. The soil renewal rate is estimated to be 0.2 mm/yr (T_1) while the maximum soil loss that should be never exceed is established in 2.0 mm/yr (T_2).

Then the following formula is applied:

$$T(x, y) = T_1 + \frac{(T_2 - T_1)}{2} + \left\{ \frac{(T_2 - T_1)}{2} \cos \left[\pi + \frac{(Z - Z_1)}{(Z_2 - Z_1)} \pi \right] \right\}$$

$$T(x, y) = 0.2 + \frac{(2.0 - 0.2)}{2} + \left\{ \frac{(2.0 - 0.2)}{2} \cos \left[3.14159 + \frac{(1.4 - 0.5)}{(2.0 - 0.5)} 3.14159 \right] \right\}$$

$$T(x, y) = 0.2 + 0.9 + \left\{ 0.9 \cos 5.0265 \right\} = 0.2 + 0.9 + 0.278 = 1.38 \text{ mm/yr}$$

(26)

runoff term as shown in equation (26).
The application of equation (26) requires evaluation of K , C , P and LS terms in a different way to integrate ~~watershed~~ watershed situations. The K , LS , C and P factors ~~are~~ are weighted according to drainage area so that the source erosion can be computed for the entire watershed in one solution of the equation. The general form of the weighting function is:

$$x = \frac{\sum_{i=1}^n x_i DA_i}{DA} \quad [24]$$

where:

x = weighted factor
 x_i = value of the factor covering drainage area DA_i
 DA = total drainage area of the watershed

Only the cultivated area of a watershed is considered in computing the P factor.

Another modification of USLE (FOSTER et al. 1973) was used by ONSTAD et al. (1976) as the major component in a sediment yield model for small watersheds:

$$A = (0.224) WKCPSL \quad [28]$$

where:

$W = a R_{st} + (1-a) 0.40 Q_p^{0.5}$ is an energy factor based either on rainfall storm erosivity R_{st} and runoff erosivity based on runoff volume Q in mm and peak ~~runoff rate~~ runoff rate.

(27)

Q_p is in mm/hr; a is a coefficient ($0 \leq a \leq 1$) that represents the relative importance of rainfall energy compared with runoff energy for detaching soil. The other terms are as defined in the USLE.

FRERE et al. (1975) developed a system to evaluate erosion as a continuous process of detachment and transport in several segment downslope having uniform factor characteristics.

The detached soil capacity is for segment j :

$$Ad_j = \frac{W_j K_j C_j P_j S_j}{31} (x_{i+1}^{1.5} - x_i^{1.5}) \quad (28)$$

where:

Ad_j = detached soil capacity of segment j (Kg/m)

K_j, C_j, P_j, S_j = the USLE factors for segment j

W_j = the energy factor for segment j

x_i = the higher limit of segment j m

x_{i+1} = the lower limit of segment j m

31 = a conversion factor.

The total upslope sediment yield for unit width is $A_t = \sum_j Ad_j$

The transport capacity at x point is

$$A_{cx_{i+1}} = \frac{W_j C_j K P_j S_j}{31} x_{i+1}^{1.5} \quad (29)$$

where:

$A_{cx_{i+1}}$ = the transport capacity at the lower end of segment j (Kg/m)

W_j = the energy factor for segment j

(28)

R_j, C_j, P_j, S_j = the USLE factors for segment j

$\bar{R}$ = effective value of R which is the average value for upslope segments

x_{i+1} = lower limit of segment j and n

There are two cases possible for slope segment j

Case 1

if $A_t \leq A_{x_{i+1}}$ erosion occurs on slope segment j because the transport capacity exceeds the total detached soil. Therefore the sediment yield G equals $G = A_t$ while the deflation $M = 0$

Case 2

if $A_t \geq A_{x_{i+1}}$ deflation occurs on slope segment j because total detachment exceeds the transport capacity. Therefore sediment yield $G = A_{x_{i+1}}$ and the deflation $M = A_t - A_{x_{i+1}}$

The gross erosion and sediment delivery ratio technique for estimating sediment yield is a two step procedure. First, the gross erosion in a drainage area is computed. The gross erosion includes interrill, rill, gully and stream erosion. The USLE and its modification can be used to estimate the sediment generated the sheet and rill erosion that is usually, but not always the major portion of a watershed's gross erosion. Sediment from gully, streambank and streambed erosion and from uncontrolled road holes must be added to the USLE estimates. Methods

(29)

for estimating sediment yield from these sources are discussed in Section 3 of the SCS National Engineering Handbook (1971) and would be above the scope here.

Sediment delivery ratio equations have been developed from studies of watersheds in particular regions. As with predictive equations, most sediment delivery ratios equations have limited regional applicability. The method of estimating sediment yield by gross erosion/sediment delivery can be summarized as follows:

$$Y = \frac{E(DR)}{W_s} \quad [30]$$

where:

Y = sediment yield per unit area

E = gross erosion

DR = sediment delivery ratio

W_s = the area of the watershed

The sediment delivery ratio is dependent upon drainage area size and from other watershed characteristics such as relief, stream length, bifurcation ratio (STRAHLER, 1964). The sediment delivery ratio is also influenced by the sediment source and its proximity to the stream, the transport system and the texture of the eroded material (RENFRO, 1975).

The SCS, USDA (1971) has developed a general delivery ratio versus drainage area relationship from data of earlier studies. It is intended that this relationship can be used

only if local or regional relationships are not established and time is not available to develop a sediment yield relationship for the project area. The relationship shows that the sediment delivery ratio varies approximately, inversely as the 0.2 power of the drainage area. The wide scatter of data used in the development of this relationship indicates that ~~additional~~ additional variables affects the relationship. Estimates of the delivery ratio may be obtained from table 7. The use of these estimates should be tempered with a consideration of other factors that may affect the sediment delivery ratio of a particular site. A higher delivery ratio should be used when the eroding soil is very high in silt or clay and lower if the eroding soil is coarse textured. The conditions of the channels and delivery system should also be evaluated to alter the general relationship of table 7 if ~~data~~ data indicate.

The gross erosion and sediment delivery ratio computation method of sediment estimation is in some respect similar to the use of empirical predictive equations which are based on watershed parameters and normally have only regional applicability. These equations are usually statistical equations developed from measured watershed parameters. The watershed variables often used are amount and intensity of rainfall, amount or peak rate of runoff, length, drainage area, size, slope or relief parameters, soil characteristics and land use descriptions. Additionally, stream geology and time

TABLE - 7

Table 2.13. General sediment delivery-ratio estimates*

Drainage area, square kilometres	Sediment delivery- ratio
0.05	0.58
0.1	0.52
0.5	0.39
1	0.35
5	0.25
10	0.22
50	0.153
100	0.127
500	0.079
1000	0.059

* From United States Soil Conservation Service (1971). Reference points taken from logarithmic plot.

parameters are found in some equations. The number of equations available for estimating sediment yield is quite large and we shall report only some examples.

The simplest equation relating sediment loss to either rainfall and runoff is the following:

$$Q_s = a Q_w^b \quad [31]$$

Where:

Q_s is sediment discharge and

Q_w is water discharge

JOVANDIĆ and VUKČEVIĆ (1958) using data for sixteen gauging station in Yugoslavia established that $b = 2.25$ whilst according to LEOPOLD et al. (1964) b ranges in value from 2 to 3. The value of a is an index of erosion severity and in the Yugoslav example $a > 0.0007$ denotes excessive soil loss and $a < 0.0003$ indicates a low erosion rate.

Probably, the nearest approach to an equation of ~~use~~ ~~form~~ FOURNIER (1960) has developed an equation relating mean annual sediment yield to rainfall, altitude and slope:

$$\log Q_s = 2.65 \log \frac{P}{P} + 0.46 (\log H) (\tan S) - 1.56 \quad [32]$$

Where:

Q_s = mean annual ~~to~~ sediment yield ($gr\ m^2$)

p = highest mean monthly precipitation (mm)

P = mean annual precipitation (mm)

H = mean altitude of the watershed (m)

S = mean slope of the watershed

Another predictive equation was developed by GAVRILOVIĆ (1965) taking in consideration more specifically the characteristics of land use and management of the several section of a watershed. The equation of ~~for~~ GAVRILOVIĆ for the watersheds of Slovenia is the following:

$$W = T h \pi \sqrt{Z^3} F \quad [33]$$

Where:

W = mean annual sediment yield (m^3/yr)

T = temperature coefficient $T = \sqrt{\frac{t}{10}} + 0.1$ where t° isothermic mean annual on the watershed

h = precipitation mean annual ~~on the watershed~~ in the watershed (mm)

$\pi = 3,14159$

F = Watershed area, (Km^2)

Z = relative erosion coefficient: $Z = XY(\varphi + \sqrt{I})$, where

X = coefficient of the ~~of~~ soil protection in relation to erosion due to the vegetative cover which range from 0.005 to 1.0 (see table 8); Y = soil erodibility index

φ = depending on lithological and soil characteristics of the watershed ranging from 0.2 to 2.0 (see table 9);

I = Coefficient expressing the type and degree of erosion process (see table 10); I = mean slope degree of the watershed -

TABLE - 8

Conditions qui influencent les valeurs du coefficient	Valeur moyen X
I BASSIN-VERSANT OU LA SURFACE TRAITÉE AVANT DE TRAVAUX CONTRE L'ÉROSION:	
Terrain entièrement dénudé, incultivable	1,00
Champs, labourés suivant la pente	0,90
Vergers et vignobles sans végétation au sol	0,70
Alpages, forêts dégradées et broussailles avec le sol érodé	0,60
Prairies, champs de trèfle et d'autres cultures semblables	0,40
Forêts ou broussailles denses et de bonne structure	0,05
II BASSIN-VERSANT OU LA SURFACE TRAITÉE APRÈS LES TRAVAUX CONTRE L'ÉROSION:	
Aménagement des lits, barrages, corrections	0,70
Champs, labourés suivant les isohypses	0,63
Champs bien cultivés, fertilisés par le mulch	0,54
Champs, labourés en bandes horizontales (strip-cropping) et assoilés	0,45
Champs en terrasses, banquettes ou gradonis	0,36
Vergers et vignobles suivant les isohypses	0,32
Gazonnement de terres dénudées, améliorations des alpages et des prés	0,30
Canaux de retardation, micro-retenues d'eau	0,27
Réseau des canaux suivant les isohypses, de densité moyenne	0,24
Reboisement, accompagné par gradonis	0,10

SIMPLIFIED CLASSES

Type de la couverture végétale	X
Forêts mixtes et broussailles denses, forêts claires avec sous-bois	0,05 — 0,20
Forêts résineuses avec sous-bois faible, broussailles claires, prés bocagères	0,20 — 0,40
Forêts et broussailles dégradées, pâturages	0,40 — 0,60
Pâturages et terres cultivées dégradés	0,60 — 0,80
Surfaces sans couverture végétale	0,80 — 1,00

TABLE - 9

Valeurs du facteur d'érodibilité du sol „Y“

Type de la roche — sous-sol	Y
Roches dures, résistantes à l'érosion	0,2—0,6
Roches mi-résistantes à l'érosion	0,6—1,0
Roches friables, stabilisées (éboulis, schistes, argiles compactes, etc.)	1,0—1,3
Sédiments, moraines, argiles et autres roches peu résistantes	1,3—1,8
Sédiments fins et terres, non résistantes à l'érosion	1,8—2,0

TABLE - 10

Valeurs du facteur „ φ “, exprimant les processus d'érosion visibles

Type et degré d'érosion dans le bassin-versant	φ
Erosion faible dans le bassin	0,1—0,2
Erosion en nappes sur 20—50 % du bassin	0,3—0,5
Erosion en nappes, éboulis et dépôts ravinés, l'érosion karstique	0,6—0,7
50—80 % du bassin érodés par affouillements et éboulements	0,8—0,9
Bassin entièrement érodé par affouillements et éboulements	1,0

The transport capacity of the stream system, especially in the talwegs, is not generally enough to transport the sediments produced on the slopes. A ~~at~~ certain amount is deposited already in the talwegs upstream to their exit, while the enlargement and longitudinal profile of slope accumulation of the streambeds favour the deposition, too. In relation to the sediment yield on the slopes, the discharge of sediments is usually reduced. In relation to this fact, GAVRIKOVIC introduce a form of delivery ratio in the following form:

$$G = WR \quad [34]$$

where:

$$R = \frac{\sqrt{0.5}}{0.25 (L + 10.0)} \quad [35]$$

where:

G = discharge of sediment in the reservoir (m^3/hr)

R = reduction factor

O = perimeter of the watershed (Km)

D = mean altitude of the watershed, defined by the use of the hypsographic curve (Km)

L = ~~length~~ Length of the watershed along the main talweg (Km)

Probably the nearest approach to an equation with world-wide general applicability on a very large scale is that developed by DOUGLAS (1976) relating mean ~~annual~~ annual suspended sediment yield (m^3/Km^2) to effective precipitation (PE):

$$Q_s = \frac{1.631 (0.03937 PE)^{2.3}}{1 + 0.007 (0.03937 PE)^{3.3}}$$

[36]

(34)

The numerator of this equation represents the direct erosive effect of rainfall whilst the denominator attempts to take account of the protective effect of plant cover.

All the predictive equations discussed here refer to drainage basins and do not provide suitable techniques for assessing soil loss from smaller areas such as ~~hilly~~ hillslopes and fields as we have seen was the scope of the USLE which remains the only operative available tool for such purpose at the moment.

- References -
(in order of quotation in the script)

35

- ZINGG, A. W. (1940) Degree and length of bank slope as it affects soil loss in runoff - Agr. Eng., 21, 59-64
- MUSGRAVE, G. W. (1947) The quantitative estimation of factors in water erosion - a first approximation - J. Soil and Water Conserv., 2, 133-138
- SMITH, D. D., and WHITT, D. M. (1947) Estimating soil losses from field area of claypan soil. Proc. Soil Sci. Soc. Am. 12, 485-490
- SMITH, D. D. and WHITT, D. M. (1958) Evaluating soil losses from field areas - Agr. Eng. 29, 394-396
- WISCHMEIER, W. H. and SMITH, D. D. (1958) Rainfall energy and its relationships to soil loss. Trans. Am. Geoph. Union, 39, 285-291
- WISCHMEIER, W. H., SMITH, D. D., and UHLAND, R. E. (1958) Evaluation of factors in the soil-loss equation. Agr. Eng., 39, 458-462
- WISCHMEIER, W. H., and SMITH, D. D. (1965) Predicting Rainfall-erosion losses from Cropland East of the Rocky Mountains. Agr. Hand. n. 537. USDA, Washington, D.C.
- HUDSON, N. W. (1961) An introduction to the mechanics of soil erosion under conditions of sub-tropical rainfall - Rhodesia Soc. Assoc. Proc., 49, 14-25

HUDSON, N. W. - (1961) Soil Conservation, Cornell Univ. Press,
Ithaca, N.Y., 322 p

ELWELL, H. A. (1977) Soil loss estimation system for
Southern Africa. Dept. of Conservation and Forestry
Res. Bull. n° 22, Salisbury, Rhodesia.

FOSTER, G. R., MEYER, L. D., and ONSTAD, C. A. (1977a).
An erosion equation derived from basic erosion
principles. Trans Am Soc Agr. Engrs 20, 675-682

FOSTER, G. R., MEYER, L. D., and ONSTAD, C. A. (1977b)
A runoff erosivity factor and variable slope
length exponents for soil loss estimates. Trans.
Am. Soc. Agr. Engrs, 20, 683-687

CHISEI, G., SFALANGA, M., TORRI, D., (1983) An approach to soil
erosion evaluation on a single rainstorm basis.
Int. Conf. on Soil Erosion and Conservation - January
16-22, Honolulu, Hawaii.

CHISEI, G. and ROSEH, V. (1984) Misure previsionali dell'erosione
superficiale sui versanti delle colline appenniniche centro-
liberatiche (in preparation)

CHISEI, G., GIORDANO, A., INDELICATO, S., LIDESTRI NICOSIA, C.,
SFALANGA, M., TORRI, D. (1982) Acquisizioni per la previsione
dell'erosione idrica sui versanti. 'Cronache Finali
del Progetto Finalizzato 'Coordinamento sui Suoli' del
C.N.R., Roma (in stampa)

WISCHMEIER, W. H. (1959) A universal erosion index for a
universal soil-loss equation - Soil loss for Soc Am
23, 246-249

ROOSE, E. (1977) Use of the universal soil loss equation to
predict erosion in West Africa. in Soil Erosion
Prediction and Control, Proceedings of the National
Conference on Soil Erosion, Soil Conservation Society
of America, Farmington, Conn., pp 143-151

ARNOLDUS, H. M. J. (1980) An Approximation of the rainfall
factor in the universal soil loss equation. in Assessment
of Erosion, ed. by M. De Boodt and D. Gabriels,
Wiley Intersc. Pub

HUDSON, N. W. (1971) Soil Conservation, Batsford, England

LAL, R. (1977) Analysis of factors affecting rainfall erosivity
and soil erodibility. in Soil Conservation and management
in the humid tropics, ed. by D. J. Greenland and
R. Lal, Wiley Intersc. Pub

KOWAL, J. M. and KASSAM, A. H. (1977) Energy load and
instantaneous intensity of rainstorms at Sokoto,
Northern Nigeria. in Soil Conservation and management
in the humid tropics, ed. by D. J. Greenland and R. Lal,
Wiley Intersc. Pub

WISCHMEIER, W. H., JOHNSON, C. B., and CROSS, B. V. (1971)
A soil erodibility monograph for farmland and
construction sites. J. of Soil and water Cons., 26(5),
185-193

ROTH, C. F., NELSON, D. W., and RIKKENS, H. J. H. (1974)
Prediction of subsoil erodibility using chemical,
minimological and physical parameters. EPA/600/2-
74-043 Washington DC US Environmental Protection

Agency, Office of Research and Development

EL-SHAIFY, S.A., DANOLER, E.W. and ARMSTRONG, C.L. (1977)

Soil erosion by water on the plateau, G.S.

U.S. SOIL CONSERVATION SERVICE, Final Report

~~WISCHMEIER~~ WISCHMEIER, W.H., and SMITH, D.D. (1973) Predicting rangeland

erosion losses. A guide to conservation planning, USDA,

Agr. Hand. n 537

SMITH, D.D., and WISCHMEIER, W.H. (1957) Factors affecting sheet and rill erosion. Trans. Am. Geophys. Union.

38, 889-896

ONSTAD, C.A., LARSON, C.L., HERMSHEIER, L.F., and YOUNG, R.A.

(1967) A method of computing soil movement throughout a field. Trans. Am. Soc. Agr. Engrs., 10, 742-745

FOSTER, G.R., and WISCHMEIER, W.H. (1974) Evaluating

irregular slopes for soil loss prediction. Trans. Am. Soc. Agr. Engrs., 17, 305-309

WISCHMEIER, W.H. (1966) Creeping - a simple and better

evaluation for a universal soil loss equation

Proc. Soil Sci. Soc. Am., 34, 322-326

WISCHMEIER, W.H. (1975) Estimating the soil conservation's

cost and management factor for undisturbed areas.

In: Present and prospective technology for predicting sediment yields and sources, ~~ARS-S-40~~ USDA,

ARS-S-40

KLOSE, E.J. (1977) Erosion at watershed and regional scales and its measurement in terms of parallel experimental analysis, ~~USDA~~ **USDA** CRSTOM

KLOSE, E.J. (1977) Use of the universal soil loss equation to predict erosion in West Africa. in SCSA, p 66-74

LOGAN, T.J. (1979) Improved criteria for classifying soil loss tolerance levels for cropland. Symp. on Determinants of Soil Loss Tolerance. Soil Sci. Soc. Am. Mtg., Ft Collins, Co.

GROSSMANN, R.B., and BERDNER, C.R. (1979) Variable T rate for cropland: prediction of depth favourable to rooting from the soil survey data base. Symp. on Determinants of Soil Loss ~~Tolerance~~ Tolerance. Soil Sci. Soc. Am. Mtg., Ft Collins, Co.

SRISHORE, E.L. (1975) Soil loss Tolerance. Symp. on Determinants of Soil Loss Tolerance. Soil Sci. Soc. Am. Mtg., Ft Collins, Co.

WILLIAMS, J.R. (1975) Sediment yield prediction with universal equation using runoff energy factor - in Present and prospective technology for predicting sediment yields and sources, USDA, ARS-S-40, 244-252

FOSTER, G.R., MEYER, L.D. and ONSTAD, C.A. (1973) Erosion equation derived from modeling principles -

Trans. Am. Soc. Civil Eng., ~~Impressions~~ ^{Impressions}
 Vol. 73-2550, St. Joseph ~~Mo.~~ Michigan

UNSTAD, C. A., PIEST, R. F., SPATEN, R. E. (1970) Watershed
 erosion: more evaluation for landward flow. Proc.
 of the Third Federal Inter-Agency Sedimentation
 Conf., PB-245-104, Water Resources Council,
 Washington, D.C., pp 1-22 - 1-34

FRERE, M. H., UNSTAD, C. A., and MOLTAN, H. N. (1975) ~~ACTHIC~~
 An Agricultural Chemical Transport Model, USDA, ARS-H-3
 US Department of Agriculture (1971) Sediment Sources, Yield and
 Delivery Ratios - National Engineering Handbook, section 3,
 Sedimentation, USDA, ARS

~~STRAHLER~~

STRAHLER, A. N. (1964) Geology, Part II. Quantitative geomorpho-
 logy of drainage basins and channel networks. In:
 Handbook of Applied Hydrogeology (V.T. Chow, ed.)
 McGraw-Hill, N.Y.

RENFRE, G. W. (1975) Use of erosion equations and sediment-
 delivery ratios for predicting sediment yields. In: Pre-
 sent and Prospective Technology for Predicting Sediment
 Yield and Sources, USDA, ARS report ARS-S-40,
 B3-45

JOVANOVIĆ, S. and VUKČEVIĆ, M. (1978) Sedimentation
 on some watercourses in Yugoslavia and analysis of
 erosion processes. Int. Res. Sediment. Geol. pub. 42, 337-359

LEOPOLD, L. B., WILMAN, M. G., and MILLER, J. F. (1960) Fluvial geomor-
 phology, Freeman, San Francisco

FOURNIER, F. (1960) Climat et érosion - la relation entre l'érosion
 et le climat (Climat et érosion - la relation entre l'érosion
 et le climat, traduit de l'anglais de Fournier, Paris)

GAVRILLOVIĆ, S. (1965) Procena srednje godišnje količine nanosa
 prema potencijalnoj eroziji. Beograd, DGA-750
 (Évaluation de la quantité annuelle moyenne des alluvions
 d'après la potentialité d'érosion)

GAVRILLOVIĆ, S. (1965) Određivanje režima nanosa bujičnog
 područja i izrada karata erozije, Beograd, DGA-750

DOUGLAS, I. (1976) Erosion rate and climate: geomorphological
 implications, in Derbyshire, E. (ed.) Geomorphology and
 Climate, Wiley, London, 269-287