

Progress in $0\nu\beta\beta$ decay search and the GERmanium Detector Array

Werner Maneschg

- on behalf of the GERDA collaboration -

Max-Planck-Institut für Kernphysik - Heidelberg

BeNu 2012 conference, September 17-21, 2012




The Abdus Salam

International Centre
for Theoretical Physics

Motivations for $0\nu\beta\beta$ decay search in 2012

Observation of $0\nu\beta\beta$ decay helps answering 3 fundamental questions:

- 1 Is lepton number conservation violated? Are neutrinos their own anti-particles?
- 2 What is the absolute neutrino mass scale?
- 3 Is the neutrino mass spectrum degenerate, normal or inverted? (Hierarchy problem)

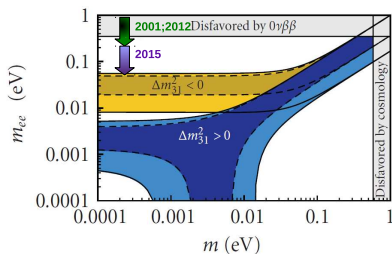


Observable: $0\nu\beta\beta$ decay rate $\rightarrow$ half-life $T_{1/2}$.
If not observed, then quoting a lower limit of $T_{1/2}$ (90% C.L.).

- **Best limit in the past** obtained by HdM (2001):
 $T_{1/2}^{0\nu} > 1.9 \times 10^{25}$ yr; $\langle m_{\beta\beta} \rangle \leq 0.35$ eV
- **KKDC claim** (2004):
 $T_{1/2}^{0\nu} = 1.17 \times 10^{25}$ yr; $\langle m_{\beta\beta} \rangle \sim (0.23-0.59)$ eV
- **New experiments:**
EXO-200 (2012):
 $T_{1/2}^{0\nu} > 1.6 \times 10^{25}$ yr; $\langle m_{\beta\beta} \rangle \leq 0.14-0.38$ eV
Within 2015: $\langle m_{\beta\beta} \rangle \leq 0.05$ eV

Half-life correlation with effective Majorana neutrino mass

$$(T_{1/2})^{-1} = G^{0\nu} |M^{0\nu}|^2 \langle m_{\beta\beta} \rangle^2$$

with $G^{0\nu}$: phase space factor, $M^{0\nu}$: nuclear matrix element, $\langle m_{\beta\beta} \rangle = \left| \sum_j m_j U_{ej}^2 \right|$



• $M^{0\nu}$ Calculations:

- **Improvements** for NSM and QRPA:
 - Most QRPA discrepancies solved (Simkovic F. et al, Phys.Rev.C 79 (2009))
 - Progress in understanding source of spread of NSM values (Faessler A. et al, (2012))
- **New methods** IBM, EDF, pHFB
- $Q_{\beta\beta}$ values: → Penning-traps (e.g. ^{130}Te : 5% shift)
- **Cross sections for neutron reactions** (e.g. $^{207}\text{Pb}(n, n'\gamma)$: DEP of 3062 keV $\simeq Q_{\beta\beta}$ of ^{76}Ge)

Request: Larger number of measurement with different isotopes

- **Avoid** (not well) known **rare background** events at $Q_{\beta\beta}$
- **NME uncertainties** $\leq 30\%$ for neutrino mass spectrum & CP violating phases
- **Mechanisms**: Light vs. heavy Majorana neutrino exchange, RHC,...

Progresses in experimental techniques

Determination of the half-life

$$T_{1/2} \propto \begin{cases} a \cdot \epsilon \cdot M \cdot T, & \text{background-free} \\ a \cdot \epsilon \cdot \sqrt{\frac{M \cdot T}{\Delta E \cdot B}}, & \text{if background is present} \end{cases}$$

with **a**: Abun./Enrich.; **M**: Mass; **ε**: act.volume; **ΔE**: e-res.; **T**: life-time; **B**: bkgd

Isotope	$Q_{\beta\beta}$ [keV]	nat.Abun. [%]	Experiment (operat./funded)	FWHM/E @ $Q_{\beta\beta}$ [%]	Mass [kg]
⁴⁸ Ca	4273.7	0.19	Candless		0.35
⁷⁶ Ge	2039.1	7.8	GERDA	0.1-0.2	15→35
			Majorana Dem.	0.1-0.2	30
⁸² Se	2995.5	9.2	SuperNEMO		7→100
			Lucifer		-
¹⁰⁰ Mo	3035.0	9.6	MOON		480
			AMoRe		100
¹¹⁶ Cd	2809.1	7.6	Cobra		64
¹³⁰ Tl	2530.3	34.5	CUORE	0.2	10→200
¹³⁶ Xe	2457.8	8.9	EXO	4.0	175
			KamLand-Zen	9.8	330→1000
			NEXT		100
¹⁵⁰ Nd	3367.3	5.6	SNO+		44




Request: Larger number of measurement with different isotopes


- **Avoid natural radioactivity**: stay above ²⁰⁸Th and ²¹⁴Bi lines
- **Advantages of single isotopes**: better ΔE, scalability/enrichment of isotope mass
- **Measurements**: independent techniques with ≤30% precision

Isotopes and experimental techniques for $0\nu\beta\beta$ decay search

- **Selected isotopes:** 8 out of 35 ($\leftarrow$ nat.Abun., $Q_{\beta\beta}$, $G^{0\nu} \propto (Z, Q_{\beta\beta}^5)$, chem.prop.)
- **Techniques:** ion., scint.(gas,liq.), track./TPC(gas,liq.,solid), cal./bolo.

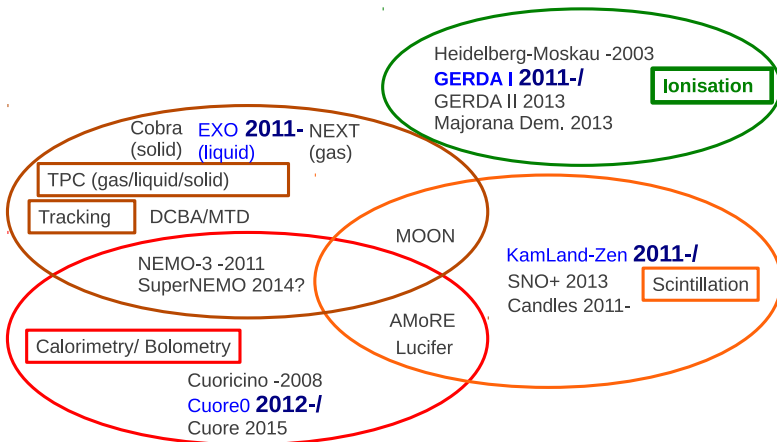

The CUORE experiment



Detectors and cryostat


- TeO_2 crystals cooled down to ~ 10 mK with He within a multi-layer copper cryostat
- Isotopic nat. abundance of ^{130}Te : 34.1% (**no enrichment!**)

Shielding

- Inner Roman lead layer and outer lead layer
- Ra barrier and neutron shield
- 1400 m overburden (3500 m w.e.) at LNGS


Concept: DBD Source = Absorber

Bolometric technique



- TeO_2 absorbs energy deposition E by particle
- Energy deposition E registered by a thermistor (NTD Ge) as temperature increase:
Signal: $\Delta T = E/C$, C : capacity
Time constant = C/G ; G : thermal coupling
Need: $\rightarrow$ low-heat $C \rightarrow$ mK + diele.diamagn.mat.
- Very good energy resolution achievable:
 ~ 5 keV @ $Q_{\beta\beta}$ (2527 keV), corr. **$\text{FWHM}/E=0.2\%$**

Scaling of the CUORE project



1 **Cuoricino** (Cuore Demonstrator) (2003-2008):

- 1 tower; 62 crystals; ^{130}Te : **11.3 kg**
- Achieved $\text{BI} = 0.169 \pm 0.006 \text{ cts}/(\text{keV} \cdot \text{kg} \cdot \text{yr})$; most prob.: surface α 's
- Limit for $0\nu\beta\beta$ half-life of ^{130}Te (90% C.L.):
 $T_{1/2}^{0\nu} > 2.8 \times 10^{24} \text{ yr}$, $\langle m_{\beta\beta} \rangle < 0.30\text{-}0.71 \text{ eV}$

(E. Andreotti et al., Astropart. Phys. 34 (2011))

2 **Cuore-0** (2012-2014):

- 1.tower of 19-tower Cuore assembly; 52 crystals; ^{130}Te : **11 kg**
→ Control detector-production chain for Cuore (recontamination)
→ As stand alone experiment: Improve BI to $0.11\text{-}0.05 \text{ cts}/(\text{keV} \cdot \text{kg} \cdot \text{yr})$


3 **Cuore** (2014-2019):

- 19 towers; 988 crystals; ^{130}Te : **206 kg**
- Goal BI : $0.01 \text{ cts}/(\text{keV} \cdot \text{kg} \cdot \text{yr})$

Status and sensitivity of Cuore-0/Cuore

Installation of Cuore-0

(spring/summer 2012)



● Cuore-0:


- Installation in cryostat completed; cooling-down and data-collection **start foreseen within July 2012**
- With $\text{BI}=0.05 \text{ cts}/(\text{keV}\cdot\text{kg}\cdot\text{yr})$, **2 yr run** (90% C.L.):
 $\rightarrow T_{1/2}^{0\nu} > 5.9 \times 10^{24} \text{ yr}, \rightarrow \langle m_{\beta\beta} \rangle < 0.17\text{-}0.39 \text{ eV}$

● Cuore:

- **Crystals** almost all arrived at LNGS
- **Radiopurity** of all crystals measured; extrapolation to BI for Cuore:
 $\rightarrow$ from bulk: $1.1 \times 10^{-4} \text{ cts}/(\text{keV}\cdot\text{kg}\cdot\text{yr})$
 $\rightarrow$ from surface: $4.2 \times 10^{-3} \text{ cts}/(\text{keV}\cdot\text{kg}\cdot\text{yr})$
- With $\text{BI}=0.01 \text{ cts}/(\text{keV}\cdot\text{kg}\cdot\text{yr})$, **5 yr run**:
 $\rightarrow T_{1/2}^{0\nu} > 1.6 \times 10^{25} \text{ yr}, \langle m_{\beta\beta} \rangle < 0.04\text{-}0.09 \text{ eV}$

The KamLAND-Zen experiment

KamLAND-Zen is '**embedded**' within
KamLAND using **Xe-loaded LS**

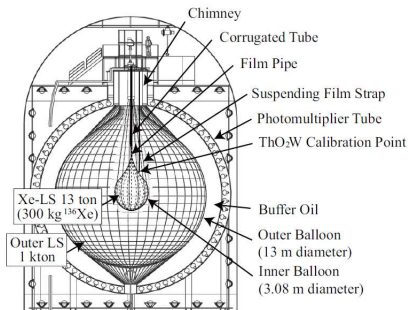

Inner balloon ($R=1.54$ m, $25\text{ }\mu\text{m}$ thick)

- 13 t of Xe-loaded LS:
 - Decane 82.3%, PC 17.7%, PPO 2.7 g/l
 - Xe ~ 3 wt% (320 kg)
- ^{136}Xe enrichment: 90.9%

1000 t KamLand LS ($R=6.5$ m)

- Dodecane 80%, PC 20%, PPO 1.36 g/l
- Active shield: ext. γ s, int. γ s from IB/Xe-loaded LS


SSS and 3.2 kt water tank

- SSS: 1879 PMTs detecting scintillation light
- Water tank: neutron moderator and muon Cherenkov detector

Advantages of using a) Xe-loaded LS b) in KamLAND

- Xe: soluble in LS (Raghavan R., PRL72 1411 (1994))
- Xe: high isotopic enrichment, extraction and purification
- Use existing ultra-pure detector; low-energy anti-neutrino measurements can continue

Measurement of $2\nu\beta\beta$ half-life of ^{136}Xe

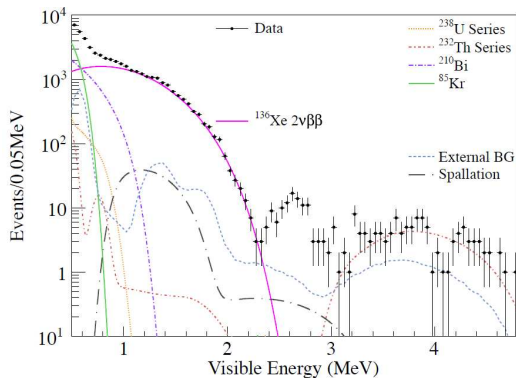

- **Fitregion:** [0.5;4.8] MeV; includes 80% of the $2\nu\beta\beta$ spectrum
- **Exposure for ^{136}Xe alone:** **38.4 kg·yr** (112.3 d; 125 kg ^{136}Xe)
- **$2\nu\beta\beta$ events:** **~35500** events; **rate:** (80.9 ± 0.7) cts/(d·ton) in Xe-loaded LS




KamLAND-Zen $2\nu\beta\beta$ half-life result (May 2012):

$$T_{1/2}^{2\nu} = 2.30 \pm 0.02 \pm 0.12 \text{ (stat+sys)} \times 10^{21} \text{ yr} \quad (\text{arXiv:1205.6372})$$

Limit for $0\nu\beta\beta$ half-life of ^{136}Xe

Unexpected peak at 2.6 MeV

- Rate stable in time, $\rightarrow$ non-shortlived radioisotopes
- Non-compatible with $Q_{\beta\beta}$ of ^{136}Xe
- Check 'all' nuclei ($\mathcal{O}(10^3)$) and decay paths ($\mathcal{O}(10^6)$)
 $\rightarrow$ Remaining candidates: ^{110m}Ar , ^{208}Bi , ^{88}Y , ^{60}Co




$T_{1/2}^{0\nu}$ result (May 2012: arXiv:1205.6372)

$T_{1/2}^{0\nu} > 6.2 \times 10^{24}$ yr, $\langle m_{\beta\beta} \rangle < 0.26\text{--}0.54$ eV at 90% C.L.

- Purification of Xe-loaded LS ongoing; $\rightarrow$ lower background ^{110m}Ar (^{208}Bi , ^{88}Y) background by $100\times$
- 600 kg Xe already in the Kamioka mine, $\rightarrow$ first $\beta\beta$ 1-ton experiment (?)
- Increased amount of Xe and cleaner balloon (less ^{214}Bi)

The EXO-200 experiment

Concept: DBD source = Detector

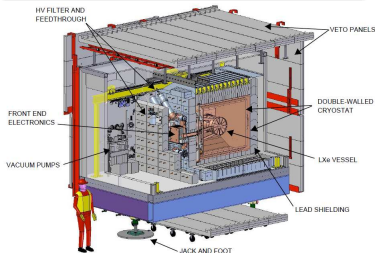


Detector design and background reduction

- LXe Vessel in ultra-radiopure copper cryostat filled with high-purity heat transfer fluid HFE7000
- Lead shield
- 4 plastic scintillators as active muon vetos
- 700 m overburden (1600 m w.e.) at WIPP lab, Carlsbad, NM

Detection principle

Medium: 175 kg of LXe; ^{136}Xe enrichment: 80.6% **Detection principle:**

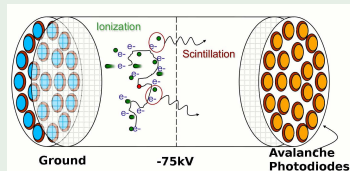

- Collection charge wires measure ionized electrons
- Large Area Avalanche Photodiodes (APDs) measure 178 nm scintillation light

Gain from:

Drifttime:

→ Position reconstruction res.: X,Y: 18 mm; Z: 6 mm


→ Distinguish single $\beta/\beta\beta$'s from multiple γ 's clusters:

Ionisation vs. Scintillation:


→ Discrimination of α from $\beta/\beta\beta/\gamma$

Calibrations with ^{60}Co , ^{137}Cs , ^{228}Th sources

Calibration points




Ionisation vs. Scintillation (^{228}Th source)



Determination of number of SSE/MSE for a spectral component


- $\beta/\beta\beta$'s are **mostly SSE**, **but** can also populate **MSE** spectrum due to bremsstrahlung (γ 's **mostly MSE**)
- Contribution to SSE/MSE spectra to be simulated for all spectral components
→ MC tested with calibrations:

Example: Region around 2.6 MeV ^{208}Tl -line



→ MC and data in **good agreement**

Measurement of $2\nu\beta\beta$ half-life of ^{136}Xe

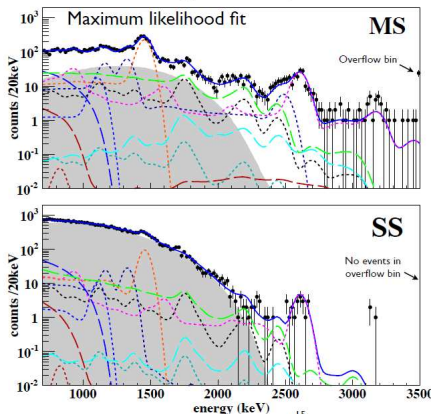

- Rejection of peripheral background by **fiducial Volume** cut:
 - Active mass of 98.5 kg of LXe (^{136}Xe : 79.4 kg)
 - LXe exposure after 120.7 d: **32.5 kg·yr**
- SSE $2\nu\beta\beta$ spectrum:
 - spectrum contains ~ 22000 $2\nu\beta\beta$ events above 0.7 MeV
 - S/B ratio of **$\sim 10/1$** !
 - SSE spectrum: 82.5% of $2\nu\beta\beta$ events (MC calc.)


Results for $T_{1/2}^{2\nu} [\times 10^{21} \text{ yr}]$

EXO-200 (May 2012): $2.23 \pm 0.02 \pm 0.22$ (stat+sys) arXiv:1205.5608

Agrees with KamLAND-Zen (May 2012): $2.30 \pm 0.02 \pm 0.12$ (stat+sys) arXiv:1205.6372

Contradicts DAMA/LXe: $>10 \text{ yr}$ (90% C.L.) (R. Barnabei et al., Phys.Lett.B 546 (2002) 23)

Limit for $0\nu\beta\beta$ half-life of ^{136}Xe

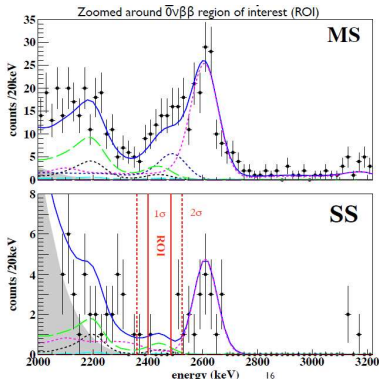

$0\nu\beta\beta$ results after 120 d with 98.5 kg of LXe (May 2012):

- Observed background: 1(5) events within 1(2) σ around $0\nu\beta\beta$ ROI
→ $\text{BI}=0.0015 \text{ cts}/(\text{keV}\cdot\text{kg}\cdot\text{yr})$ → within specs!
- $T_{1/2}^{0\nu} > 1.6 \times 10^{25} \text{ yr}$, $\langle m_{\beta\beta} \rangle < 0.14\text{--}0.38 \text{ eV}$ (90% C.L.)

The GERDA experiment

Plastic scintillator

- active muon veto

Clean room (cl.10000)

- access to detector
- insertion lock
- system

Water tank

- $R=5\text{ m}$, $h=9.0\text{ m}$, 590 m^3 ultra-pure water
- acts as neutron moderator/absorber
- acts as muon Cherenkov veto

Concept: DBD Source = Detector



Background reduction:

- material screening
- graded passive shielding;
- active vetos;
- operation of bare Ge diodes in LAr
- Particle identification techniques

Ge detector array

- 1-string and three arm with each 3 detectors (Phase I)
- up to ~ 12 strings
(depending on final design for Phase II)

Large Cryostat


- $R=2\text{ m}$, $h=5.9\text{ m}$, 64 m^3 LAr
- Acts as cooling medium
- Acts as passive shielding
- Will act as active background suppression using scintillation (Phase II)

GERDA: construction milestones

- 1 **Lol:** 2004
- 2 **R&D:** since 2004 (i.e. material screening, testing bare Ge diodes in LAr etc.)
- 3 **Construction:** 2008-2010
 - cryostat & cryogenic infrastructure
 - water tank & muon veto
 - clean-room and lock system



Location in Hall A at LNGS (3500 m w.e.)



Phase I: Installed detectors


- **Technology:** refurbished co-axial HPGe detectors from HdM, IGEX and GTF experiments
- **Mass:**
 - 1 **6 enriched** (^{76}Ge : $\sim 86\%$): 14.63 kg:
ANG2-ANG5, RG1, RG2;
(ANG1 and RG3: drawing leakage current after installation and thus excluded from DAQ)
 - 2 **3 natural** (^{76}Ge : 7.83%): 7.59 kg: GTF112, GTF45, GTF32
- **Operation:** bare diodes in LAr on low-mass holders



→ Commissioning phase: 2010-2011


→ Start of Phase I data collection: November 9, 2011

Phase I: detectors' performance and stability

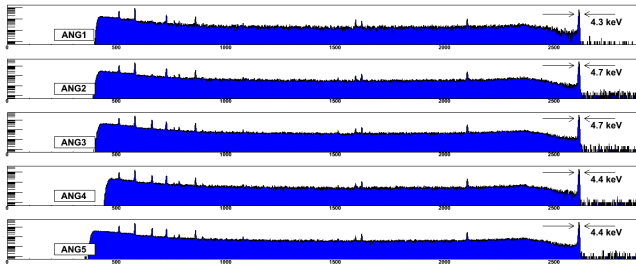

- **Energy resolution:** 4.5-5.1 keV (FWHM) @ 2614.5 keV; 4.5 keV @ 2039 keV
- **Stability I:** Constant energy resolution and no significant shift of energy scale
→ Duty cycle 'high', i.e. $\sim 95\%$ in (DAQ start - June 2012); effectively $\sim 80\%$ due to 1 run rejected after temperature instabilities in clean room.
→ Exposure for enriched detectors until September 6, 2012: 9.55 kg.yr
- **Stability II:** No significant increase of leakage current !


Phase I: Energy spectra for natural and enriched diodes

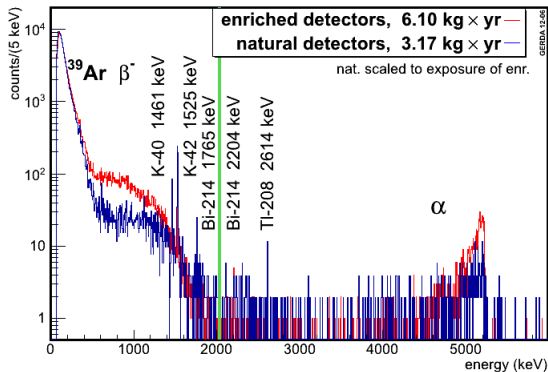

- **Background index at $Q_{\beta\beta}$:** 'low', however unexpected ⁴²Ar background
- **Pulse shape discrimination:** no PSD technique applied so far
- **Blinding:** **automatic blinding** of $Q_{\beta\beta}$ region in (2039 ± 20) keV region applied since January 11, 2012

Phase I: ^{42}Ar background

^{42}Ar Level scheme



● Problematics:

① ^{42}Ar : long-lived ($T_{1/2}=32.9\text{ y}$)

② ^{42}K : β decay into ^{42}Ca :

$Q_{\beta^-}=3525.4\text{ keV}$,
 $E_{\gamma}=1524.7\text{ keV}$ (81.9%
Emis.Prob.)

③ Expected concentration:

$<41\text{ }\mu\text{Bq/kg}$ at 90% C.L. (v.d.

Ashitkov et al.,

Inst. Exp. Tech. 46(2003)153)

However: collection of ions
through E-field from HV

● **Improvement:** $60\text{ }\mu\text{m}$ thin cylindrical
Cu foil around strings

→ Background reduction: $3\times$




Preliminary measurement of ^{42}Ar :

In GERDA: $92.8\pm 5.2(\text{syst})4.5\pm(\text{stat})\text{ }\mu\text{Bq/kg}$

In R&D setup LArGe: consistent result using a different method

Phase I: Measurement of $2\nu\beta\beta$ half-life of ^{76}Ge

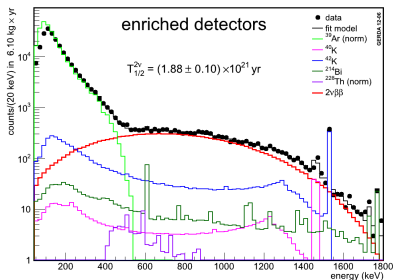

- **Fit:** region (600-1800) keV; May 2011-Nov 2012; only enriched detectors
→ **S/B ~ 8/1** !
- **Free parameters:** ^{40}K , ^{42}K , ^{214}Bi , $T_{1/2}^{2\nu}$, active mass, enrichment


Results for $T_{1/2}^{2\nu} [\times 10^{21} \text{ yr}]$

Preliminary GERDA result: 1.88 ± 0.10 (sys+stat)

Comparison to weighted average of previous measurements: 1.50 ± 0.10

(A. Barabash, Phys.Rev.C, 81 (2010) 035501)

Phase I: Achieved Background Index at $Q_{\beta\beta}$ of ^{76}Ge

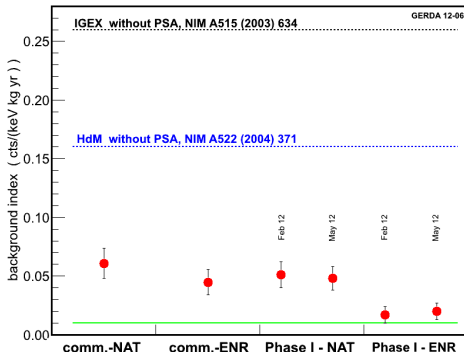

- **BI definition:** $Q_{\beta\beta} \pm 100$ keV (minus blinded 40 keV region)
- **Achieved BI:** $0.020^{+0.006}_{-0.004}$ cts/(keV·kg·yr)
→ Design BI of 0.01 cts/(keV·kg·yr) **almost reached** !
- **GERDA Phase I vs. HdM:** continuum around $Q_{\beta\beta}$ and most gamma lines are **1 order of magnitude less** intense
- **^{42}Ar :** non-problematic for Phase I

Goal of Phase II: Lowering the BI to $\leq 0.001 \text{ cts}/(\text{keV}\cdot\text{kg}\cdot\text{yr})$

Determination of the half-life





$$T_{1/2} \propto a \cdot \epsilon \cdot \sqrt{\frac{M \cdot T}{\Delta E \cdot B}}, \quad (\text{if background is present})$$

where:

- **a**: Abundance of $0\nu\beta\beta$ candidate isotope → **Enrichment**
- **ϵ** : Efficiency → **precise characterisation via dedicated acceptance tests**
- **M**: Mass → **Increasing target mass**
- **T**: DAQ life-time **high duty cycle**
- **ΔE** : energy resolution → **Novel detector technology with improved resolution**
- **B**: Background
 - **Avoid cosmogenic activation of germanium**
 - **Pulse shape discrimination using novel detector technology**
 - **Instrumentation to detect LAr scintillation light**


GERDA Phase II detectors

- **Goal:** Background rejection in the **bulk** by distinguishing single-site events (SSE) from multi-site events (MSE); additionally, **surface** events on the p^+ (i.e. amplified current pulses) and n^+ (i.e. slow pulses) contact can be discriminated
- **Solution:** Unsegmented Broad Energy germanium detectors (BEGe) with **enhanced pulse shape discrimination (PSD)** properties

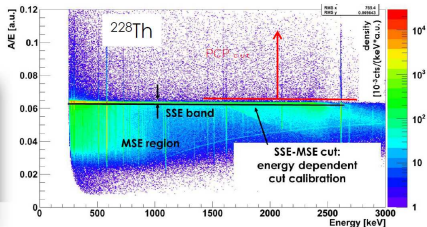

Status: BEGe detector procurement

- **Crystal pulling** at Canberra in Oak Ridge, TN (USA): **accomplished**
- **Diode production** at Canberra in Olen (BE): **ongoing**
 - 12 out of 30 crystal slices converted into diodes
 - diode acceptance tests on-site at SCK, Mol (BE): **ongoing**
 - 5 BEGe's (**3.63 kg**) in GERDA since July 7, 2012 for tests and intrinsic background studies
- **Expected additional mass:** **~20 kg**





First 5 BEGe diodes: preliminary averaged results

	In Vacuum	In LAr
FWHM @ 2.6 MeV	2.35 keV	3.18 keV
PSD efficiency	DEP: 0.90	DEP: 0.90
	SEP: 0.09	SEP: 0.11
	FEP: 0.13	FEP: 0.15
	ROI: 0.38	ROI: 0.46

GERDA Phase II: 'Light instrumentation'

- **Goal:** Background rejection via detection of **scintillation light** in liquid argon ($\lambda=128$ nm)
- **R&D** with **LArGe** test facility at LNGS

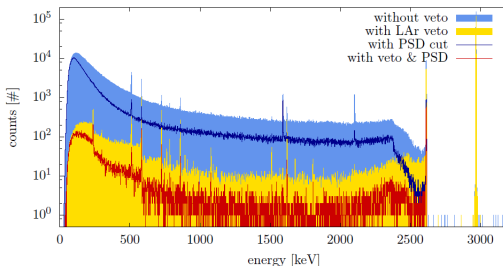

Results for ^{60}Co and ^{228}Th source (M. Heisel, Diss.2011)


source	position	LAr Veto	PSD	total
^{60}Co	int	27 ± 2	76 ± 9	3900 ± 1300
^{228}Th	ext	25 ± 1	2.8 ± 0.1	129 ± 15
	int	1180 ± 250	2.4 ± 0.1	5200 ± 1300

Preparations for Phase II: LAr scintillation read-outs


PMT teststand




PMT Design



Glass-fibre
teststand



Glass-fibre design



- ❶ Option: PMT light instrumentation (based on LarGe experience)
- ❷ Option: Wavelength-shifter glass-fibre with SiPMs
- ❸ Option: large area avalanche photodiodes or UV sensitive SiPMs on custom-made low-activity substrates

→ **Most advanced solution:** combination of 1. and 2. option


Summary GERDA

1 Phase I:

- **Running** since November 9, 2011;
- **Background index** almost within specs
- **Exposure**: $\sim 9.55 \text{ kg}\cdot\text{y}$ (September 6, 2012) - $2\nu\beta\beta$: New measurement of halflife of $T_{1/2}^{2\nu}$ in ^{76}Ge
- **Analysis**: blinded in $Q_{\beta\beta}$ region; **unblinding in spring 2013**

2 Phase II:

- **Preparations ongoing** (det.procedure, light instr., elec.readout)
- **Planned installation** of new infrastructure: **early 2013**

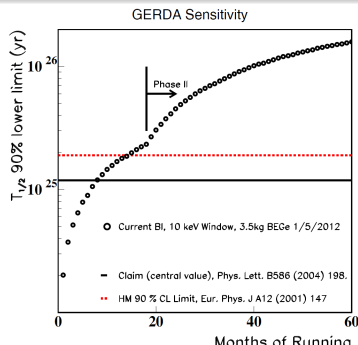

Summary: status of $0\nu\beta\beta$ search experiments

- If range $\langle m_{\beta\beta} \rangle = 0.1-0.5$ eV holds (if KK claim confirmed):
 - Observation by EXO-200, KamLAND-Zen (^{136}Xe) and GERDA (^{76}Ge) in (early) 2013
 - Other experiments that will be finalized in the next years will observe the $0\nu\beta\beta$ decay in other isotopes (SNO+ ^{150}Nd , Cuore in ^{130}Te ,...)
 - Precision-experiments have to follow (to improve NME and understand exchange mechanisms)
- If range $\langle m_{\beta\beta} \rangle = 0.02-0.05$ eV holds:
 - Necessity for large scale enrichment and lower background reduction
 - Possible experiments: Gerda Phase III and Majorana, Cuore marginally, KamLand-Zen(2),...
 - Discovery in 3-4 isotopes necessary to confirm the observation and to improve the theoretical nuclear calculations

2013+ will be exciting time for $0\nu\beta\beta$ search !